MIO-AX8-1

P/N: T130086

Copyright

© 2017, FLIR Systems, Inc.

All rights reserved worldwide. Names and marks appearing herein are either registered trademarks or trademarks of FLIR Systems and/or its subsidiaries. All other trademarks, trade names or company names referenced herein are used for identification only and are the property of their respective owners.

Document identity

Publ. No.: T130086
Release:
Commit: 39004
Language: en-US
Modified: 2016-12-14
Formatted: 2017-02-25

Website

http://www.flir.com

Customer support

http://support.flir.com

Disclaimer

Specifications subject to change without further notice. Camera models and accessories subject to regional market considerations. License procedures may apply. Products described herein may be subject to US Export Regulations. Please refer to exportquestions@flir.com with any questions.




Part number	MT-29125
Model	MIO-AX8-1
Compatible FLIR camera model	AX8
General description	The MoviTHERM MIO series intelligent I/O solutions are designed to turn FLIR cameras instantly into a complete remote monitoring system. Easy to set up, easy to configure. The quick and easy way to your thermal imaging solution.
Key features	• Compatible with FLIR AX8 cameras • Monitor one camera • Configure alarms via the built-in web server • Digital outputs (24 V DC) • 4-20 mA outputs • Ethernet connectivity
Typical applications	• Critical vessel monitoring • Condition monitoring • Process monitoring • Early fire detection
Maximum cameras supported	1
Ethernet connection	100Base-T
Communication protocol	Modbus TCP/IP
4-20 mA transmitter channels	2 channels, loop powered, isolated
Digital output channels	2
Digital output current	0.5 A per channel, 1.5 A all channels
Digital output voltage	10–30 V DC
Power supply voltage	24 V DC
Maximum power consumption	3 W
Dimensions (L × W × H)	145 mm × 90 mm × 40 mm (5.7 in. × 3.6 in. × 1.6 in.)
Weight	0.23 kg (0.5 lb.)
Enclosure material	ABS


P/N: T130086
© 2017, FLIR Systems, Inc.
#T130086; r. /39004; en-US


Shipping information	
Packaging type	Cardboard box
List of contents	MoviTHERM MIO-AX8-1 unit (DIN rail mountable), manual on USB drive
Packaging weight	0.3 kg (0.66 lb.)
Packaging size (L × W × H)	181 mm × 113 mm × 50 mm (7.13 in. × 4.4 in. × 1.99 in.)
Country of origin	USA

Compatible with the following products:

- 71201-0101; FLIR AX8 9 Hz

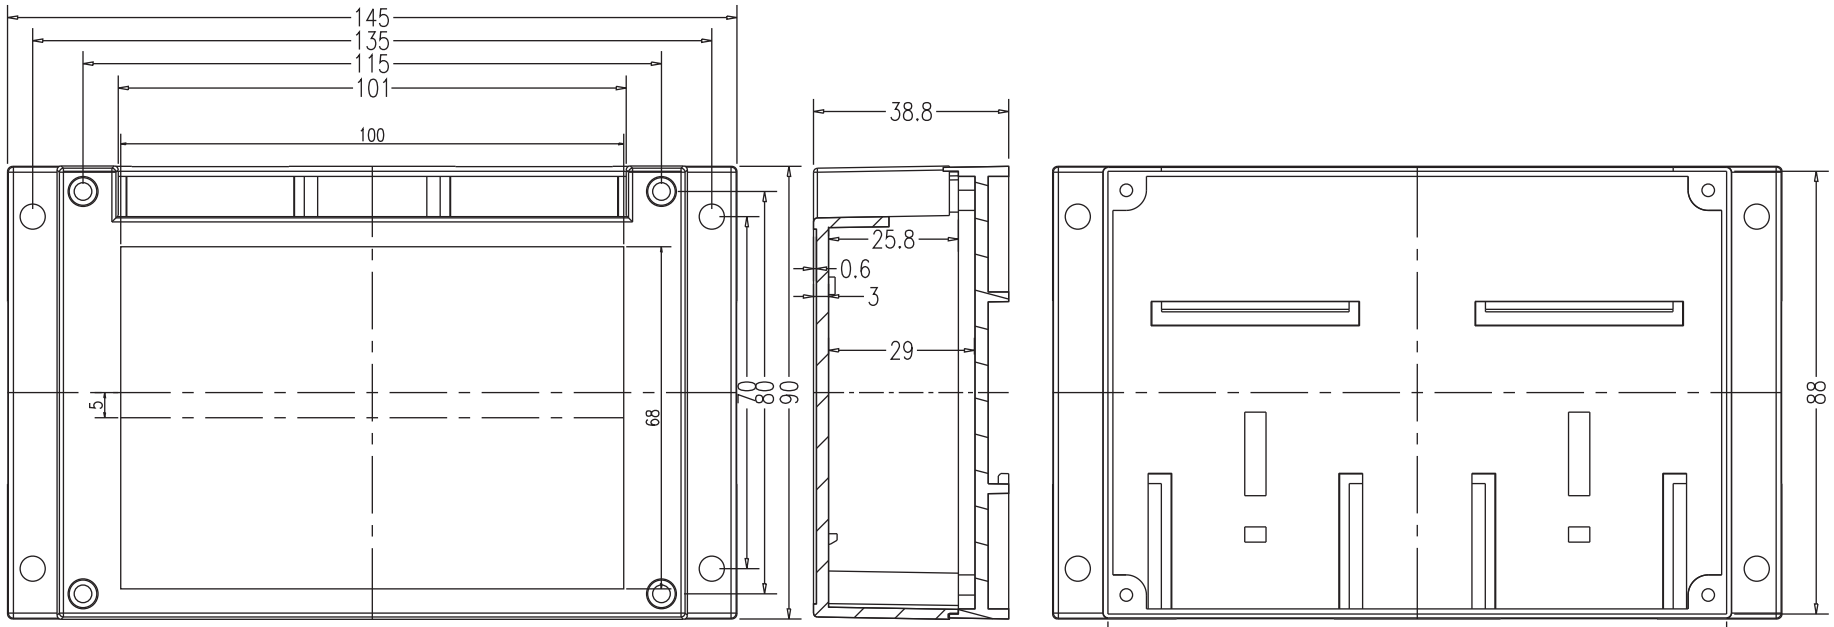

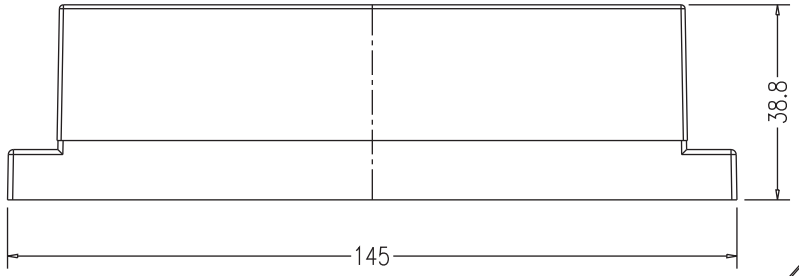

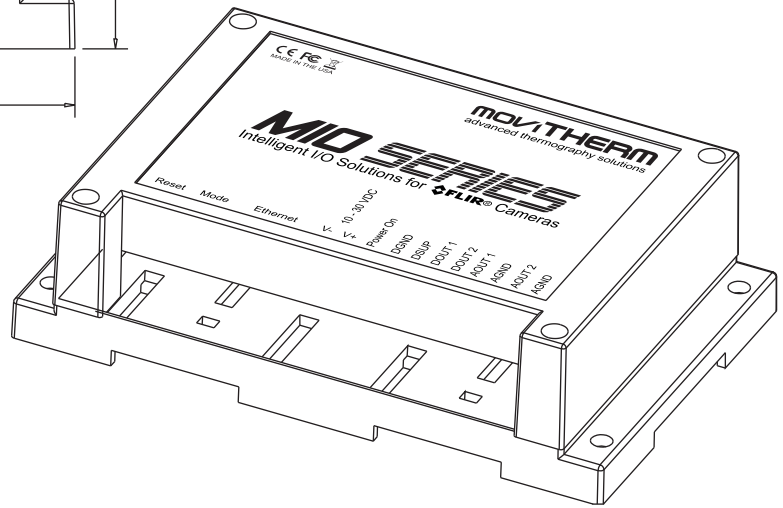

MoviTHERM 15540 ROCKFIELD BLVD. C 110 Irvine, CA 92618, USA			
NAME	MIO-XXX-1	P/N (Model)	MT-29125 (MIO-AX8-1) MT-29325 (MIO-FCR-1) MT-29525 (MIO-A310-1)
SIZE	145 * 90 * 40 mm		
3ST		ENCLOSURE MATERIAL	ABS
SCALE 1 / 1	UNIT mm		