Front mounting plate kit (incl. cooling bracket)

P/N: T199163

Copyright

© 2017, FLIR Systems, Inc.

All rights reserved worldwide. Names and marks appearing herein are either registered trademarks or trademarks of FLIR Systems and/or its subsidiaries. All other trademarks, trade names or company names referenced herein are used for identification only and are the property of their respective owners.

Document identity

Publ. No.: T199163
Release:
Commit: 42932
Language: en-US
Modified: 2017-05-30
Formatted: 2017-05-31

Website

http://www.flir.com

Customer support

http://support.flir.com

Disclaimer

Specifications subject to change without further notice. Camera models and accessories subject to regional market considerations. License procedures may apply. Products described herein may be subject to US Export Regulations. Please refer to exportquestions@flir.com with any questions.



General description
Front mounting plate kit for mounting a FLIR AX8 camera. Includes cooling bracket.


Physical data


Shipping information	
Packaging, type	Cardboard box
List of contents	• Front mounting plate • Cooling bracket • Screws
Packaging, weight	0.269 kg (0.59 lb.)
Packaging, size	183 × 136 × 63 mm (7.2 × 5.4 × 2.5 in.)
EAN-13	4743254002135
UPC-12	845188011659
Country of origin	Sweden ×

Compatible with the following products:

- 71201-0101; FLIR AX8 9 Hz

This document must not be communicated or copied completely or in part, without our permission. Any infringement will lead to legal proceedings.
FLIR SYSTEMS AB

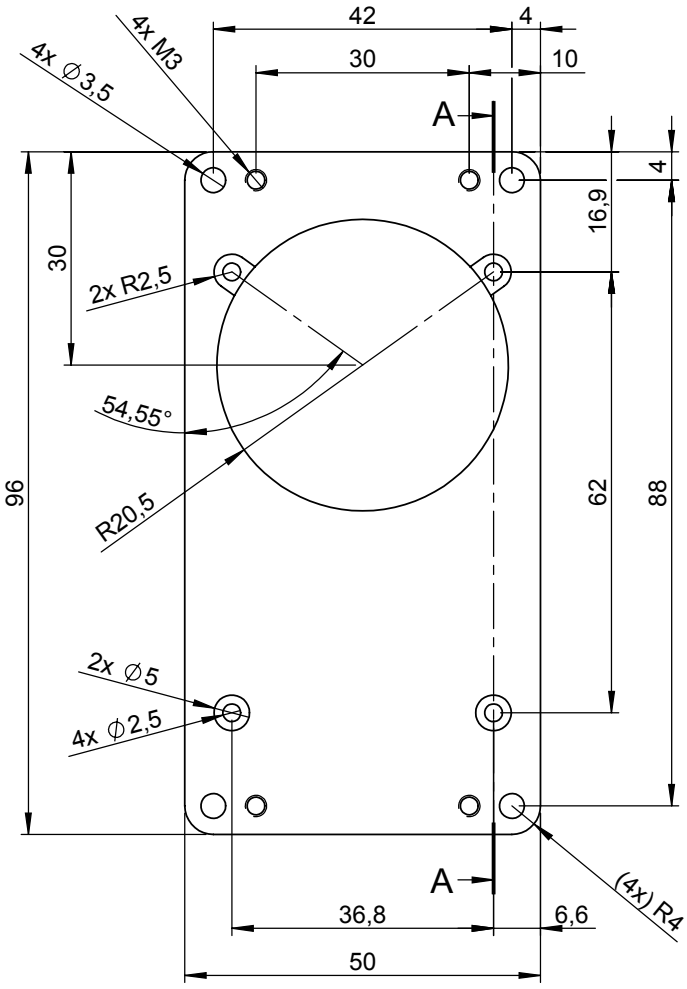

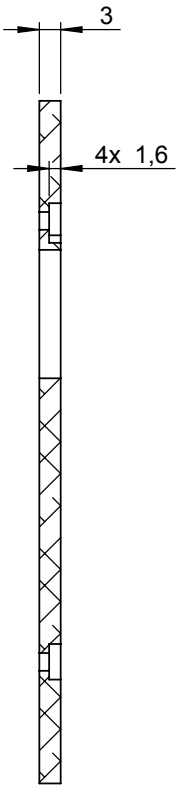

SECTION A-A

-

Konstr/Drawn	Datum/Date	Kontr/Check	Material
J. MÄKINEN	2015-03-06	HAOS	EN AW-5052 or EN AW-5754
Ändrad av/Modified by	**Ändrad/Modified**	**Ytjämnhet/Roughness**	**Ytbehandling/Surface treatment**
J. MÄKINEN	2015-05-21	Ra µm	

Där ej annat anges/Unless otherwise stated
Gen tol ISO 2768-mK
Utdrag ur/Excerpt from ISO 2768-m

0,5-6	±0,1	Hålkälsradier
(6)-30	±0,2	Fillet radii
(30)-120	±0,3	
(120)-400	±0,5	Kanter brutna
(400)-1000	±0,8	Edges broken

Benämning/Denomination


Plate mounting front

Skala/Scale	Blad/Sheet
1:1	1(1)
Art.No.	**Size**
	A4
Ritn nr/Drawing No	**Rev**
T128774	A


Denna handling får ej delges annan, kopieras i sin helhet eller delar utan vårt medgivande. Överträdelse härav beivras med stöd av gällande lag.
FLIR SYSTEMS AB

This document must not be communicated or copied completely or in part, without our permission. Any infringement will lead to legal proceedings.
FLIR SYSTEMS AB


Machined from extruded or machined profile

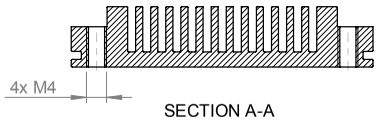


SECTION A-A

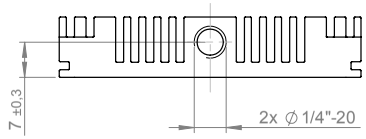



Profile Extruded or machined

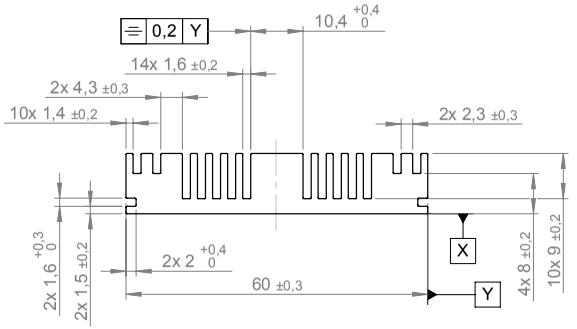

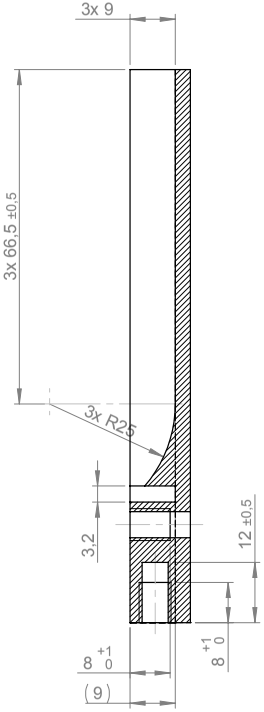


SECTION C-C

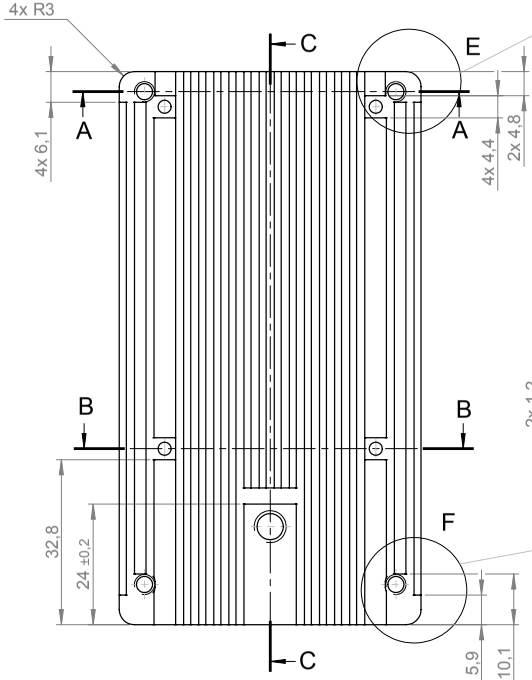






DETAIL E
SCALE 2 : 1



DETAIL F
SCALE 2 : 1

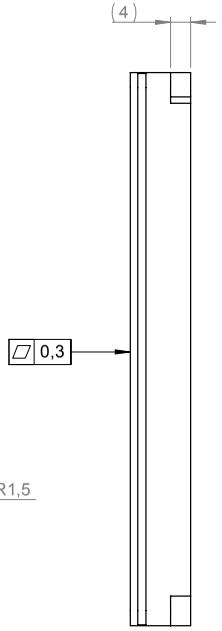

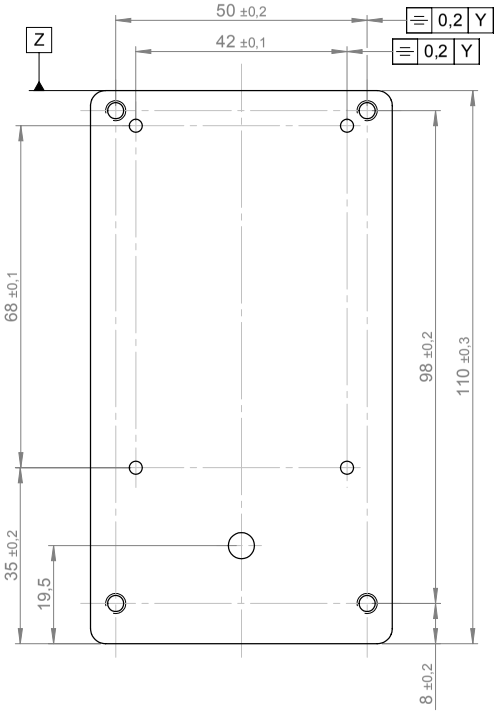

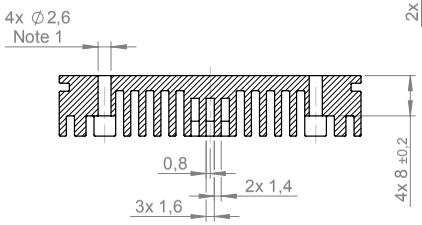

SECTION B-B

Note 1
4x ø2,6 used to hold the part during surface treatment.

Note 2
Appearance according to FLIR Appearance standard 403093-B Class C, grade 2.

Additional geometry is taken from 3D-file: T128394 A

Konstr/Drawn: P. MARCUS	Datum/Date: 2014-09-18	Kontr/Check: JAMA	Material: EN AW-6262 R	FLIR
Ändrad av/Modified by: P. MARCUS	Ändrad/Modified: 2015-03-10	Ytjämnhet/Roughness: Ra 3.2 µm	Ytbehandling/Surface treatment: Anodized colorless matt	
Där ej annat anges/Unless otherwise stated Gen tol ISO 2768-mK Utdrag ur/Excerpt from ISO 2768-m 0,5-6 ±0,1 (6)-30 ±0,2 (30)-120 ±0,3 (120)-400 ±0,5 (400)-1000 ±0,8 Hålkälsradier Fillet radii 0.1-0.3 Kanter brutna Edges broken 0.1-0.3	Benämning/Denomination: Bracket cooling			Skala/Scale 1:1 · Blad/Sheet 1(1) · ArtNo. · Size A3 · Ritn nr/Drawing No T128394 · Rev A

Denna handling får ej delges annan, kopieras i sin helhet eller delar utan vart medgivande. Överträdelse av detta delvis med stöd av gällande lag.
FLIR SYSTEMS AB